


Z710


FULLY RUGGED 7" TABLET

- 7" LumiBond™ display with sunlight readable technology
- Android 4.1 OS
- MIL-STD 810G and IP65 certified
- GPS and E-compass
- 5MP auto-focus camera
- HD web camera
- Up to 10 hours of battery life**
- Optional 1D/2D barcode reader

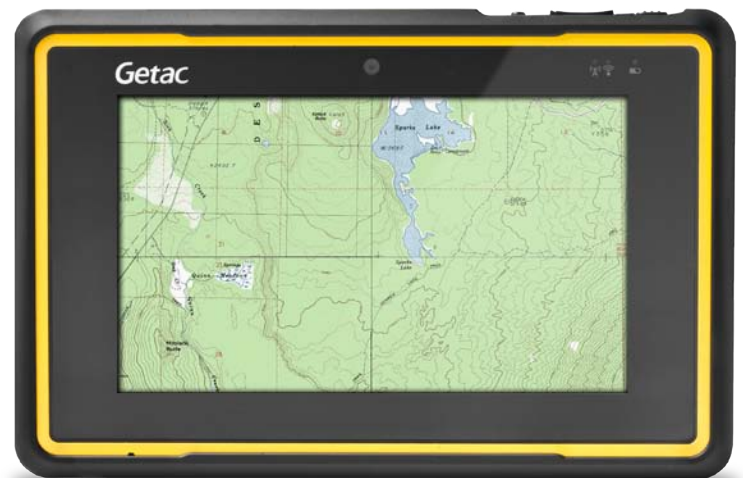

Strong Sunlight Viewable Display.

To increase the screen durability and provide greater sunlight readability, the Z710 features LumiBond™ optical bonding and also uses special damage-resistant Gorilla® Glass. Making the Z710 both tough and scratch resistant to withstand the abuses of working in extreme conditions.



Built to Survive.

The Z710 was designed from the inside out to be sleek, thin and tough. Only Getac manufactures rugged tablets down to the chassis. The Z710 is specifically engineered to be protected against drops, shocks, spills, vibration and more. The Getac Z710 is ready for whatever you can put it through.



Dual Camera

They say a picture is worth a thousand words and the Z710 provides two options to insure you capture the necessary video or images while you're in the field. With its HD web-cam and 5MP auto-focus camera, you can be sure your data is documented accurately



Design to Capture.

With both barcode scanning and RFID reading capabilities, the Z710 is the ultimate device for capturing data.



Fast and Accurate GPS.

The SiRFstarIV™ GPS chipset provides twice the search capacity of earlier chips for faster location and improved accuracy down to 2.5 meters. Combined with its an E-compass and 3-axis accelerometer, the Z710 is the perfect device for anyone using GPS data in the field.



3 Year Warranty.

We're confident in our quality and that's why the rugged Z710 comes standard with a 3-Year bumper-to-bumper warranty. It's the peace-of-mind protection of knowing you're covered.

GETAC Z710

Specifications



Getac

ruggedsales@getac.com
www.getac.com
949.681.2900

Getac, Inc.
43 Tesla
Irvine, CA 92618

Ruggedness	MIL-STD-810G and IP65 certified Vibration resistant Drop resistant (26 drops from 1.82m / 6ft) Optional ANSI/ISA 12.12.01	Communications	Built-in microphone x 1 Optional 3.5G WWAN (HSPA+/UMTS/GSM/ GPRS/EDGE) 802.11 b/g/n Bluetooth (v2.1+EDR class 2) SiRFstarIV™ GPS (with internal antenna) RF antenna pass-through for GPS and WWAN
Operating System	Android 4.1	Cameras	HD Web camera 5M pixels auto focus camera
Microprocessor	Texas Instruments® OMAP 4430 Dual Core 1 GHz processor	Special Features	E-compass Optional 1D/2D Imager barcode reader Optional 13.56MHz RFID and contactless smart card reader
Memory	1GB MDDR	Power	AC adapter (24W; 12V/2A, 100-240VAC; 50/60 Hz) Lithium-Polymer smart battery (7600mAh) (up to 10 hours of battery life)**
Storage*	16GB iNAND	Dimensions and Weight	8.58" x 5.6" x 1.08" (21.8 x 14.2 x 2.7 cm) 1.77 lbs (800 g)†
Display	7.0" TFT LCD WSVGA (1024 x 600) LumiBond™ display with sunlight readable technology Glove-friendly capacitive touchscreen	Temperature	Operating: -4°F to 122°F / -20°C to 50°C Storage: -40°F to 158°F / -40°C to 71°C Humidity: 95% RH , non-condensing
Expansion Slot	Micro SDHC (up to 32GB)	I/O Interfaces	USB (client 2.0) x 1 USB (host 2.0) x 1 DC in Jack x 1 Docking connector (30-pin) x 1 Speaker x 1
GPS Sensor	Chipset: SiRFstarIV™ Receiver Type: L1 (C / A) Channels: 48 channels all-in-view tracking Update Rate: 1 Hz Horizontal Accuracy: i) Autonomous: 2.5 m / 8.2 ft ii) DGPS: 2.0 m / 6.56 ft Cold Start Time: 35 sec average Warm Start Time: 35 sec average Hot Start Time: 1 sec average Reacquisition: 0.1 sec average	Warranty	3 Year bumper-to-bumper warranty standard††
Included Accessories	Stylus with tether Hand strap Wrist strap		

Specification subject to change without notice.

* For storage, 1GB = 1 billion bytes; actual formatted capacity less.

** Battery performance will vary based on software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions. As with all batteries, maximum capacity decreases with time and use and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.

† Weight varies by configuration and manufacturing process.

†† 3 year bumper-to-bumper warranty standard. For warranty terms and conditions visit www.getac.com

Copyright 2013, Getac, All Rights Reserved. Getac, the Getac logo and LumiBond™ are either registered trademarks or trademarks of Getac Technology Corporation in the United States and/or other countries. All other trademarks are the property of their respective owners.